



Surfing anonymously

Practical tips for the cautious user Malte Bublitz | Apr. 29th, 20!

%hy&

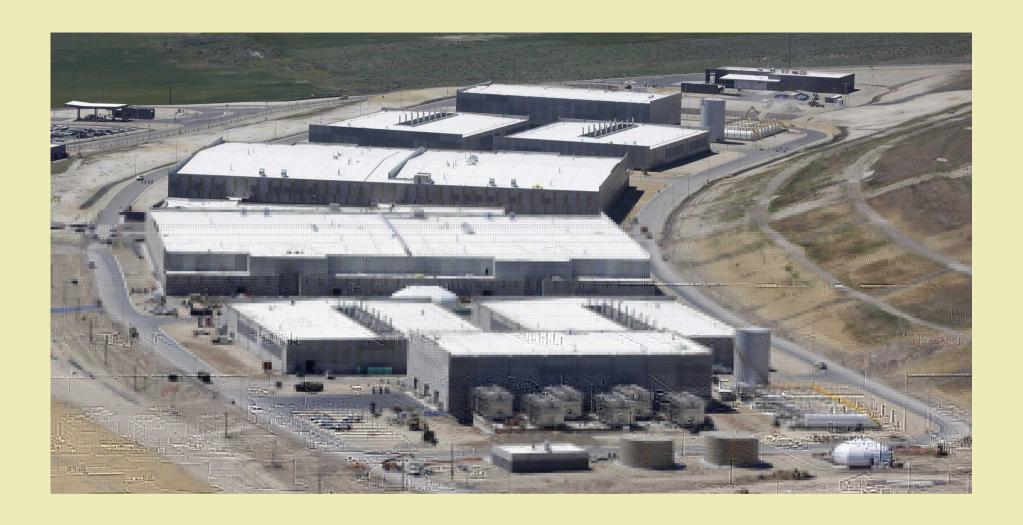

$$(SA\$) * +, $B(-\$etc.$$

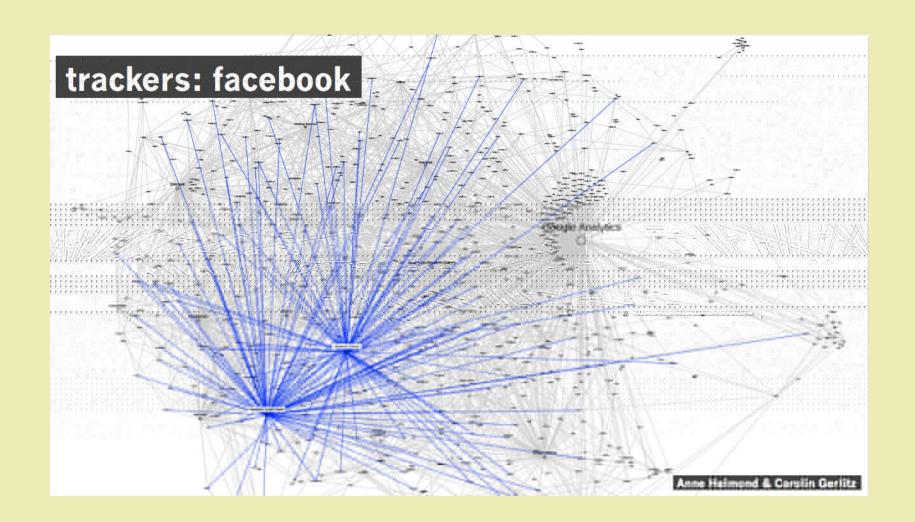

.rac/er

1our 2ata is your 2ata

tl52r

-o not trust anyone Seperate 2ifferent acti6ities 7se non8(SA8infiltrate2 soft4are -o not be lazy5 the e9tra effort is 4orth it.

. hat 4as too short:

-o not use social net4or/s, or use a 2ifferent bro4ser

-o not enter pri6ate 2ata unless <u>really</u> re; uire2

Seperate Bro4sers\$Profiles for 2ifferent acti6ities

(e6er use the same connection <=P(\$Pro9y> for pri6ate acti6ities, rea2ing ne4s an2 research


7se fa/e i2entities

(e6er trust anyone <not e6en your o4n computer>

7se Aree\$Bibre Cpen Source Soft4are

%eb bro4sers Airefo9, Mi2ori
Mail clients .hun2erbir2, *la4s Mail, Eontact Email
hat clients Pi2gin,) afim, +e9 hat, Mumble
Cperating System -ebian, Parabola, .ails, AreeBS-

Bro4ser settings an2 a22ons

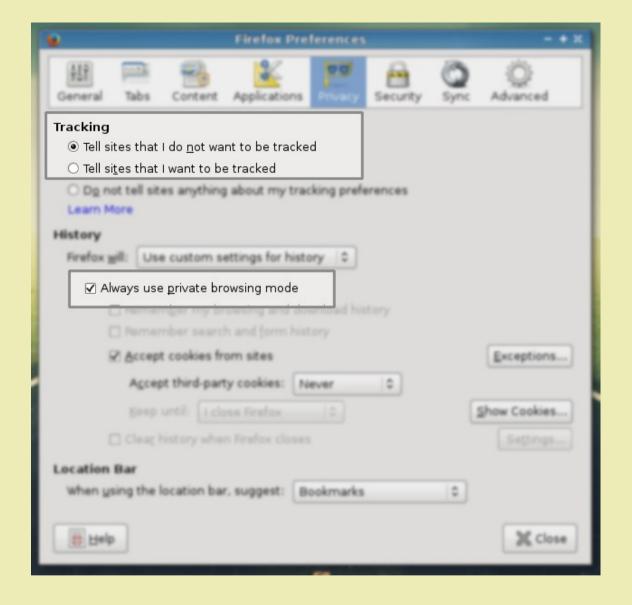

-isable trac/ing an2 history

© Configure IPFloo	od +×
Headers to overwrite	
✓ X-FORWARDED-FOR	
☑ CLIENT-IP	
✓ VIA	
Behaviour Random IP within a range	
O Selected IPs within a list	
☐ Synchronize IP together	
IP range	
From: 0 . 0 .	0.0
To: 255 . 255 .	255 . 255
IP list	
	Add
	Remove
White list	
	Add
	Remove
	X Close


Preten2 a 4rong P



Aa/e 7ser Agent

7se . CI

7se
$$a = P($$

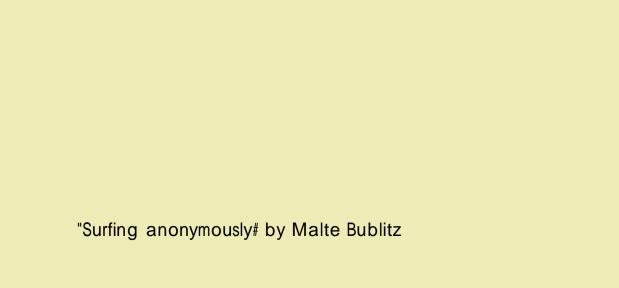







7se an alternate mail pro6i2er

Al4ays remember the basic rule

